

Elite Timber Supplies Ltd

Part of the Elite Group of companies


Specialist supplier in constructional timber, landscaping and building products.



www.elite-timber.com

0800 622 6838

info@elite-timber.com

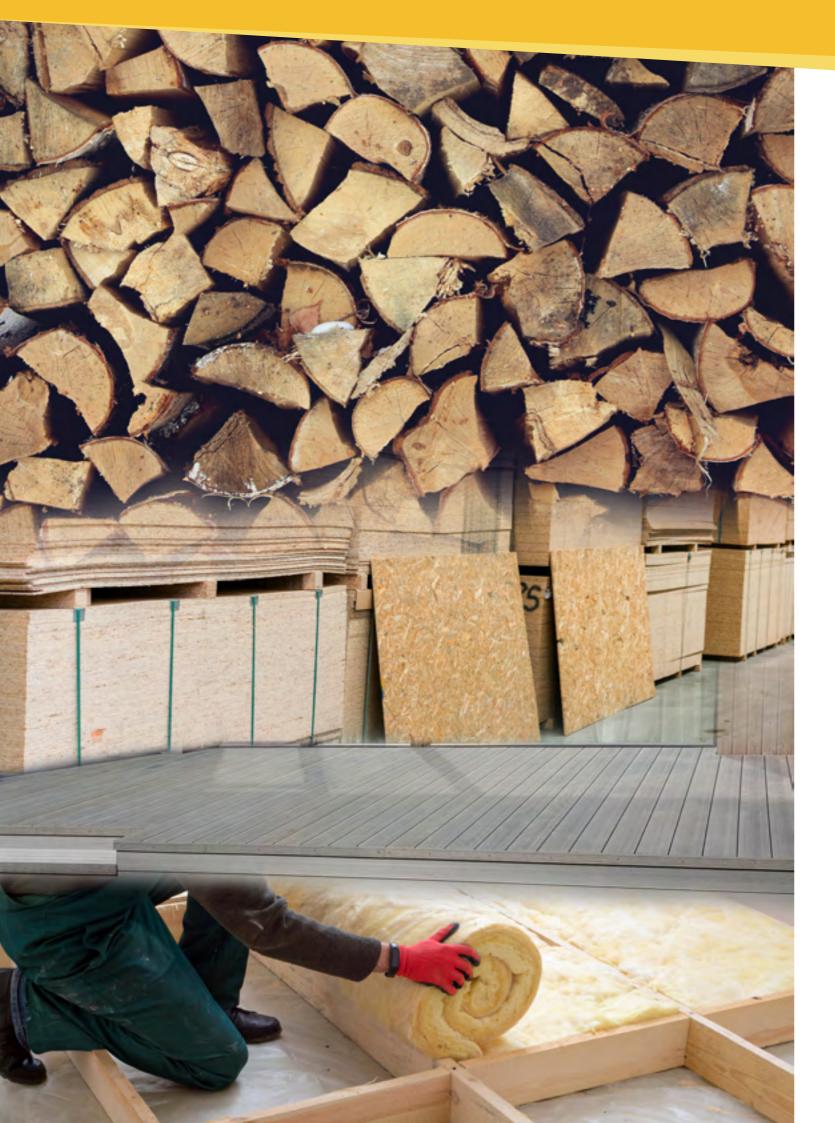

Contents

Introduction

Timber

Sheet Materials

Composite Alternatives

Building Materials

Insulation Cement Instarmac Mortar Tubs Elite RubbleTruck™

Introduction	1
Timber	5
Sawn & Treated	7
Oversized & Specialist	8
Decking	ç
CLS	10
Cladding	11
MDF Mouldings	12
Mouldings	13
Hardwood	14
Joinery & PAR	15
Hardwood Timber Bog Mats	16
Sheet Materials	17
Plywood Sheets	19
MDF Board	20
OSB	21
Chipboard Sheets	22
Hardboard Sheets	23
Plasterboards	24
Fire Rated Board	25
Specialist Sheet/Board	26
Composito Altornativos	27
Composite Alternatives	
Composite Decking	29
Composite Cladding	31
Ground Protection Mats/Spoilboards	32
Ground Reinforcement & Stabilisation	35
Building Materials	37
Insulation	39
Cement	41
Instarmac	42
Mortar Tubs	43

44





Introduction

Elite Timber Supplies Ltd is a specialist supplier in constructional timber, landscaping and building products for many types of projects.

We are part of the *Elite Group of companies*

The Elite Group consists of Elite GSS, MultiMatts and Elite Timber Supplies. Elite GSS supply specialist non-mechanical plant and equipment for sale and hire, whilst Multimatts specialises in commercial and industrial matting and ground stabilisation solutions.

The next natural step was to expand the business through a joint venture with Elite Timber Supplies, supplying timber boards, sheets and other related items.

Our philosophy

Listening and responding to customer's needs and requirements is our key to offering a bespoke service. So, no matter the project requirements, we can provide a complete service from a team that you can rely on for advice and to provide high-quality, sustainable solutions. At Elite Timber Supplies we strive to obtain products of superior quality with unequalled value for our customers.

Harry Ball, Director

Business overview

66

We source, stock and deliver timber, composite products and building materials to the construction and building industries.

Our cornerstones ensure that commitment to customers is kept, by providing products that are highly reliable, competitively priced and give complete satisfaction.

We are always seeking ways to do more, helping you to complete the project.

Opening times

Monday	7:30am - 5:30pm
Tuesday	7:30am - 5:30pm
Wednesday	7:30am - 5:30pm
Thursday	7:30am - 5:30pm
Friday	7:30am - 5:30pm



Our Expert Services

Our skilled team are committed to sourcing timber produce, from extensive resources and craftsmen, and adapting them for a sustainable future. Be sure to know, if you can't find exactly what you're looking for, we do our utmost to acquire what you need.

With the environment in mind, we always look to reduce waste and emissions, during the process of manufacturing to the finish, and we love to improve what we do.

Meet the Directors

Harry Ball Director

Kris Heard Director

We build long lasting relationships

Find out the way our Directors work and their interests. Read their profile by visiting elite-timber.com/about

Certifications and Accreditations

	PEFC Certified
	This product is from sustainably managed forests and controlled sources
PEFC/16-37-2259	www.pefc.co.uk

PEFC[™] Council (Programme for the Endorsement of Forest Certification)



Look for our FSC[®]-certified products

FSC[®] (Forest Stewardship Council[®])



Our Key Standards

All natural

Logistical

Wood is sourced to the high standards of the Sustainable Forestry Initiative and Forest Stewardship Council guidelines.

third-party operations ensures we are well managed to provide an outstanding delivery service.

Elite Timber Supplies prides itself on first rate customer service, quality made products and all round reliability.



UK delivery

All areas of the UK are covered, as well as same or next day delivery available on many products.

Bespoke products

Sometimes standard specifications won't suffice, so our bespoke service is specific to what you're looking for.



Location

We are situated in the South East of England, but you're never too far wherever you are in the UK.



Our service

Our team have many years of combined knowledge to help and give you advice about timber.

- 3



Working closely with national



On-site consulting and advice is just one of the ways we can support your projects, like manufacturing, joinery, carpentry or millwork.





Financial advice

You can count on us! We have a fantastic customer service to demonstrate when you contact us.



Better price

If cost is a necessity, we competitively price our timber products and can often outclass to meet budgets.



Timber



We only obtain wood from reputable and ethical contacts that originate from responsibly sourced forests. Our timber products have been developed over many years, where some can take up to 50% longer to produce more growth rings, in our pursuit to produce high quality solutions. Through the mill, we can cut and machine wood to your specific requirements including thickness, shape and length!





Sawn & Treated Our sawn timber is natural, rough sawn and untreated making it most suitable...

Oversized & Specialist We supply large sections and long length timber that are oversized for your particular use...



Cladding From the traditional feather edge, to a rustic edge, or smooth shadow lines of shiplap...



MDF Mouldings Save time, effort and money with our MDF Mouldings that have resistance...



Joinery & PAR Perfect for interior joinery projects and applications requiring a smooth and clean finish...



Hardwood Bog Mats 100% hardwood for temporary roadways that are long-lasting, withstanding loads of 50+ tonnes..





0

in





Decking High quality composite and joinery grade that is easily installed onto supporting parts...



Mouldings Mouldings that are easy to install, to give your project a premium and sleek finish...



CLS

The wood is durable, robust and generally used for timber home construction, internal, studwork...



Hardwood

Kiln dried for durability, the Hardwood's performance and appearance can be shaped...

Sawn & Treated Timber

Properly sourced timber from sustainable European sawmills with an expansive range of sizes.

Our Sawn Timber is natural, rough sawn and untreated making it most suitable for indoor structures, joists and joinery applications where there is little moisture or dampness.

Types







Sawn

Treated

Specifications

Width x Thickness	Lengths	
38-225mm x 19-75mm	2.4m-6m	
Tolerances:	3mm	
Species:	Pine	
Profiles:	Square edge / regularised	
Grading:	C16 / C24	
Treatments:	Brown or green	

Please visit our website for specific sizes and disclaimer or contact us for lengths greater than 6 metres and heights greater than 75 millimetres.



Oversized & Specialist Timber

Timber is cut to specific requirements using cross cutting saws and milling equipment. Machine or visually graded are available in GS and SS grading, depending on species, and other ungraded and graded sections are normally C16 or C24 grading.

Types



Specifications

Width x Thickness	
100-300mm x 47-295mm	6m-9m
Tolerances:	3mm
Species:	Pine
Profiles:	Square edge
Grading:	C16 / C24
Treatments:	Brown or green

Please visit our website for specific sizes or contact us for lengths greater than 9 metres and with varied heights and widths.

www.elite-timber.com



info@elite-timber.com

in

O



Lengths



We are with you every step of the way with communication for a great level of service.



Made to measure

Accuracy is important, so we do our utmost to find right sized items to match the job's requirements.

Decking Timber

High quality joinery grade and composite to transform the look of any project.

Manufactured from softwood or hardwood and finished to precision, the wood is treated with preservatives and kiln-dried for a long-life span, so that it's natural with no chemicals.

Types









Pine

Hardwood Thermowood Composite

Specifications

Width x Thickness	Lengths	
150mm x 32mm	2.4-6m	
Tolerances:	3mm	
Species:	Pine, Hardwood, Thermowood or Composite	
Profiles:	Cascaded / reeded / smooth	
Grading:	Not applicable	
Treatments:	Various treatments available – contact us to find out more	

Please visit our website for specific sizes or contact us for bespoke lengths, we can source a vast portfolio of profiles and sizes.



CLS Timber

Exceptional stability for wall partitioning, carcassing and studwork.

Our CLS (Canadian Lumber Standard) Timber is made from premium wood fibre and planned all round with rounded corners to ensure a strong profile, which is effective for internal joinery and framing applications.

This durable and robust high-quality timber is sustainably sourced from Scandinavia and other European softwood countries with minimal harm to the environment.

Specifications

Width x Thickness	Finished Width x Thickness	Lengths
75-150mm x 50mm	63-140mm x 38mm	2.4-5.4m
Tolerances:	3mm	
Species:	Spruce	
Profiles:	Not applicable	
Grading:	C16	
Treatments:	Clear	

Please visit our website for specific sizes or contact us with your requirements, we can source a vast portfolio of profiles and sizes.



in

O

- 9





Cladding Timber

A cost-effective solution with a low carbon footprint for a contemporary look to exterior walls.

Transform the appearance of external buildings through a variety of profiles, from traditional feather edge to rustic waney edge or smooth shadow lines of a shiplap profile.

Types



Waney edge



Feather edge

Shiplap

Specifications

Width x Thickness	Lengths	
Custom sizes to fit your project		
Tolerances:	3mm	
Species:	Many types of Timber or Composite	
Profiles:	Feather edge / Waney edge / Shiplap	
Grading:	Custom made to requirements	
Treatments:	Various treatments available - contact us to find out more	

Please visit our website for specific sizes or contact us with your requirements, we can source a vast portfolio of profiles and sizes.



MDF Mouldings Timber

Add a splash of design and character to any internal housing project.

MDF (Medium-Density Fibre) Mouldings are machined for precision cutting and primed ready for each-and-every project, from architraves to skirting or edging to shelving.

Easily install to save time and effort, giving your project a premium and sleek finish. This timber holds resistance to warping, swelling, knotting and moisture, which makes it a long-lasting solution.

Specifications

Width x Thickness	
Custom sizes to fit your p	project
Tolerances:	3mm
Species:	MDF (Medium-Density Fil
Profiles:	Custom made to require
Grading:	Custom made to require
Treatments:	Various treatments availa

Please visit our website for specific sizes or contact us with your requirements, we can source a vast portfolio of profiles and sizes.



Bespoke products Sometimes standard specifications won't suffice, so our bespoke service

- 11 -



in

O



Lengths

- ibre)
- ements
- ements
- lable contact us to find out more

is specific to what you're looking for.



Financial advice

Support doesn't have to end after a sale. We care to help you get the results for your project.

Mouldings Timber

An inexpensive way to add value to your home or renovation project.

This durable and attractive product is easy to install using standard woodworking tools and can be fixed with adhesive, pins, screws, or nails.


Our Mouldings are precision cut, with the option of bespoke sizes and are resistant to warping, swelling and knotting. The unfinished panels can be easily primed, painted, stained, or varnished to give them the perfect look to match your décor.



Specifications

Width x Thickness	Lengths	
Custom sizes to fit your project		
Tolerances:	3mm	
Species:	Many types	
Profiles:	Custom made to requirements	
Grading:	Custom made to requirements	
Treatments:	Unfinished	

Please visit our website for specific sizes or contact us with your requirements, we can source a vast portfolio of profiles and sizes.

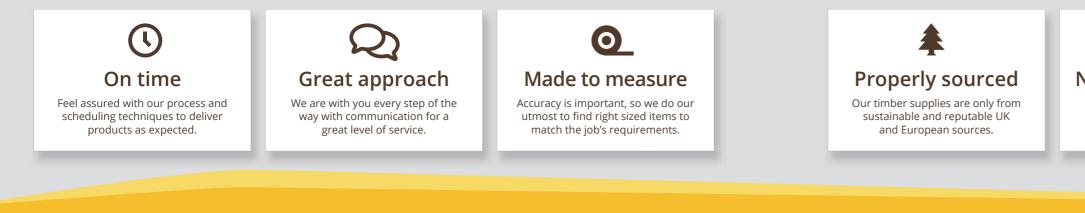

in

Hardwood Timber

Wood that is slow grown for a denser formation with different species that lends itself to a variety of uses.

The growth characteristics of Hardwood, like density and grain for example, reduce the tendency to split and make it a long-lasting timber for a variety of applications.

Our Hardwood is generally kiln dried for durability, performance and appearance so it can be shaped into a variety of objects for internal or external joinery, furniture, construction, flooring and more.

Specifications

Width x Thickness	
Custom sizes to fit your p	project
Tolerances:	3mm
Species:	Hardwood
Profiles:	Custom made to requirer
Grading:	Custom made to requirer
Treatments:	Various treatments availa

Please visit our website for specific sizes or contact us with your requirements, we can source a vast portfolio of profiles and sizes.

www.elite-timber.com





Lengths

ements

ements

lable - contact us to find out more

1 2 3

No minimum order

Order the quantities you need, no matter what the product or your project size.



Expert team

You can count on us! We have a fantastic customer service to demonstrate when you contact us.

Joinery & PAR Timber

The quality of our product is green and sustainable for the environment. Our Planed All Round (PAR) and Planed Square Edge (PSE) joinery timber is extremely versatile and bespoke for interior joinery projects and applications requiring a smooth and clean finish.

Types



Pine

Tolerances:

Species:

Profiles:

Grading:

Treatments:

Specifications

Width x Thickness

Custom sizes to fit your project

3mm



Hardwood Timber Bog Mats

Provide support and access for hefty loads in soft and boggy conditions.

100% Hardwood Timber is long-lasting for multi-purpose use, reducing axle weight pressures and risk of damage, where access is needed with a temporary roadway or to an underground service.

Types



Specifications

Width x Thickness	
1m x 70-300mm	3m / 5m / 6m
Weight:	230-1600Kg
Load:	Suggested loading 50-20 Weight tested up to 250
Species:	100% Hardwood Timber

Please visit our website for specific sizes or contact us with your requirements, we can source a vast portfolio of profiles and sizes.



Width x Thickness	
1m x 70-300mm	3m / 5m / 6m
Weight:	230-1600Kg
Load:	Suggested loading

in

O


Please visit our website for specific sizes or contact us with your requirements, we can source a vast portfolio of profiles and sizes.

Pine (Whitewood / Redwood)

Squared edge / machined

Brown, green or clear

Not applicable

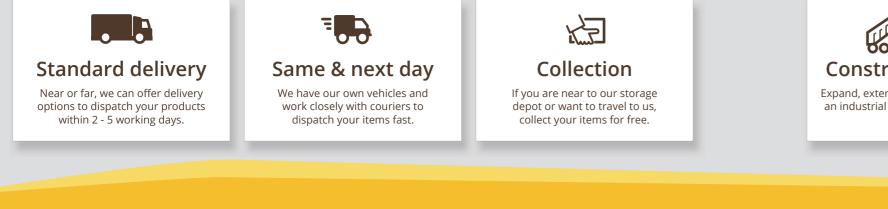

Lengths

- 15 -







Lengths

00 tonnes tonnes (depending on ground conditions) / Ekki wood



Improve surrounding land with decorative structures



Building

Long lasting, thermal, insulated or fire retardant items




Sheet Materials



As you'd expect, our sheet materials are practical for both internal and external structural or non-structural purposes to get the desired results for your project.

Products are manufactured from solid or recycled timber and made of timber particles in the form of fibres or veneers, to create versatile wood panels that can be used in almost all forms of construction, interior designs and structural work.





Plywood Sheets Improved strength and stability to prevent Plywood Sheets from warping and splitting...

MDF Board MDF Board (Medium Density Fibreboard) has less tendency to split without any grain...



Hardboard Sheets With one smooth side and one coarse side, Hardboard Sheets are much stronger...



Plasterboards Versatile for insulation and moisture reduction when drywall lining in single or multiple layers...







OSB (Oriental Strand Board) is attractive and has been responsibly sourced, ready for..



Fire Rated Board

Designed to be fire resistant whilst withstanding wet and humid conditions...



Chipboard Sheets These eco-friendly panels are free of natural defects, resistant to warping and splintering...



Reusable sheet or board with textured sides to provide extra stability for concrete formwork...

Plywood Sheets

A versatile, flexible and cost-effective sheet material solution with improved stability. Our Plywood Sheets are durable, with all benefits from using pure wood. These fantastic multipurpose panels are for either internal or external applications with various finishes and thicknesses available.

Types







Hardwood

Softwood

Specifications

Width x Thickness	Lengths
1200mm x 4-25mm	2.4m
Tolerances:	0mm
Species:	Hardwood or Softwood
Profiles:	Square edge
Grading:	EN636-2 / EN636-3
Treatments:	Fire treatment options available

Please visit our website for specific sizes or contact us to find out more on our fire treatment options.



MDF Board

A lighter alternative than most boards and a practical timber replacement. Our flexible MDF (Medium-Density Fibre)

Board is isotropic, meaning that there is less of a tendency to split without any grain, and manufactured from a mixture of wood fibres, waves, and resins then hot pressing to different thicknesses.

It follows the contours of any surface when installed, is free of natural defects and smooth sanded for a precision finish.


Specifications

Width x Thickness	
2440-3050mm x 6-30mm	1.22-1.83m
Tolerances:	0mm
Species:	MDF (Medium-Density I
Profiles:	Square edge
Grading:	FSC [®] certified / BS EN 6 EN 320, EN 319, EN 318
Treatments:	Moisture resistant as st

Please visit our website for specific sizes or contact us for MDF Boards to improve fire resistance performance.







in

O.



Lengths

Fibre)

522-H1, EN 622-5, EN 335-3, EN 324-1, EN 321, 3 and EN317

tandard. Fire treatment options available

1 2 3

No minimum order

Order the quantities you need, no matter what the product or your project size.



Expert team

You can count on us! We have a fantastic customer service to demonstrate when you contact us.

OSB

A durable alternative to plywood.

OSB (Oriental Strand Board) is responsibly sourced from European Mills, ready for engineering through wood strand layer compression with adhesives. Added treatment of moisture resistant resins can enhance moisture resistance.

Types






Tongue & Groove

Specifications

Width x Thickness	Lengths
1200-1220mm x 9-18mm	2.4-2.7m
Tolerances:	0mm
Species:	Not applicable
Profiles:	Square edge / Tongue & Groove
Grading:	BS EN 323, EN 324-1, EN 324-2, EN322, EN 321, EN 319, EN 317, EN 310, EN 13986 and EN 120 BBA approved under BS 5268: Part 2, 2002 and Eurocode NHBC technical standards
Treatments:	Moisture resistance or fire treatment

Please visit our website for specific sizes or contact us with your requirements, we can source a vast portfolio of sizes.

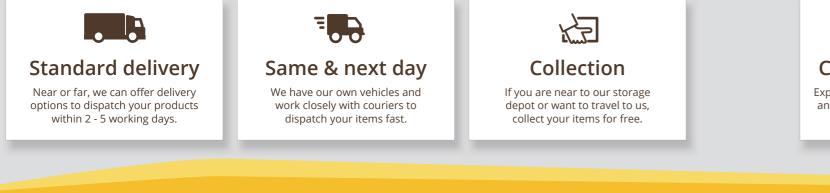



Chipboard Sheets

A budget option for versatile furniture, shelving, cabinets and in-building work. Chipboard Sheets (Low-Density Fibreboard) are made from wood chips compressed and laminated with synthetic resin. They are eco-friendly, free of natural defects and resistant to warping and splintering.

Treatments





»))

Waterproof

f Slip resistant film

lm Acoustic

Specifications

Width x Thickness	
600mm x 18-22mm	2.4m
Tolerances:	0mm
Species:	Not applicable
Profiles:	Square edge / Tongue &
Grading:	FSC [®] accredited, BBA cer
Treatments:	Waterproof, slip-resistan

Please visit our website for specific sizes or contact us with your requirements or to find out more on our treatments.





in

O.



Lengths

Groove

rtification and BS EN 312-5

nt film, heavy-duty film or acoustic



Improve surrounding land with decorative structures



Long lasting, thermal, insulated or fire retardant items

Hardboard Sheets

Multi-purpose sheet panels for flooring and general internal non-structural use. Hardboard Sheets are denser than MDF Boards, with one smooth side and one coarse side for extra grip.

Once primed and sealed, they can be painted or vinyl coated.

Treatments





Oil tempered

Moisture Resistant

Specifications

Width x Thickness	Lengths
610-1220mm x 3.2-6mm	1.2-2.44m
Tolerances:	0mm
Species:	Not applicable
Profiles:	Square edge / perforated
Grading:	Not applicable
Treatments:	Oil tempered or moisture resistant

Please visit our website for specific sizes or contact us with your requirements, we can source a vast portfolio of sizes.



Plasterboards

A versatile solution for insulation and moisture reduction when drywall lining within modern buildings.

We have a specific range of Plasterboards to meet many requirements, starting from the standard size of 1200mm wide sheets specifically designed to suit 600mm stud spacing and variable to particular sizes.

Our Plasterboards can be installed in single or multiple layers to create maximum safety and comfort within housing projects and residential environments.

Specifications

Width x Thickness	
1200mm x 12mm	2.4m
Tolerances:	0mm
Species:	Not applicable
Profiles:	Square edge / tapered
Grading:	Not applicable
Treatments:	Not applicable

Please contact us for Plasterboards to reduce noise transmission or improve fire resistance performance.

www.elite-timber.com

- 23 -

info@elite-timber.com

in

O

- 24 -



Lengths

Bespoke products

Sometimes standard specifications won't suffice, so our bespoke service is specific to what you're looking for.



Financial advice

Support doesn't have to end after a sale. We care to help you get the results for your project.

Fire Rated Board

Increased fire protection with Euroclass B & C for domestic separating walls, garages, corridors and timber floors.

Our Fire Rated Board is non-combustible and adapted for drylining, wall lining and ceiling systems whilst holding stability within damp conditions and resistance to mould growth.

Types








Softwood

Specifications

Width x Thickness	Lengths	
1220mm x 7-30mm	2.4-3.1m	
Tolerances:	0mm	
Species:	Hardwood or Softwood	
Profiles:	Square edge	
Grading:	PEFC [™] and FSC [®] approved - check our website for more information	
Treatments:	Fire rated and enhanced to Euroclass B & C	

The above dimensions are for our standard option, for B S2 d0 only options please visit our website for specifications.

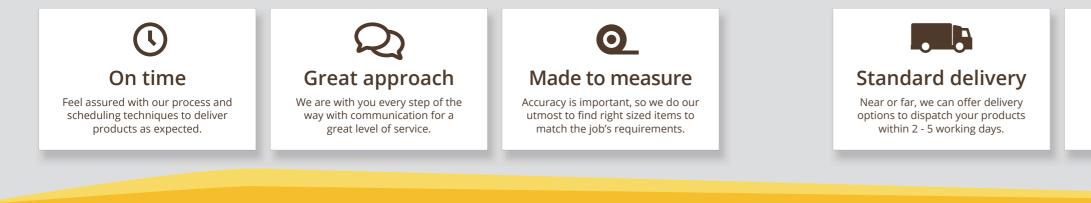

in

O

Specialist Sheet/Board

Produce an exceptional finish with MDO (Medium Density Overlay) plywood. Our Specialist Sheet/Board is FSC certified, strong to the core and available with a thin and thick layer either side. Its properties make it ideal to be reused for concrete formwork.

Types





Hardwood

Softwood

Specifications

2.4m
0mm
Hardwood or Softwood
Square edge
FSC [®] approved and grad
Various treatments ava

Please visit our website for specific sizes or contact us with your requirements, we can source a vast portfolio of sizes.





Lengths

ading available ailable – contact us to find out more



We have our own vehicles and work closely with couriers to dispatch your items fast.



Collection

If you are near to our storage depot or want to travel to us, collect your items for free.




Composite Alternatives



Accomplish a lower budget project in style with alternatives that cover, protect or stabilise buildings and grounds. These Composite Alternatives are engineered mainly by mixing a percentage of recycled wood and artificial materials to be more durable than other standard resources, for improved durability and resistance to weather conditions.



Composite Decking The composite boards have the same look as normal wood without the need for staining...

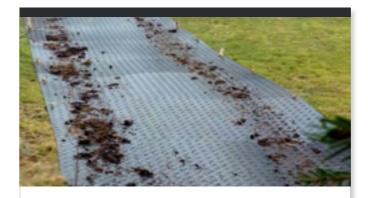

Ground Protection Mats/Spoilboards Provide short and long-term access, for both small and large plant and machinery...





Composite Cladding

There are multiple colours of Composite Cladding to choose from for architects, developers...




Ground Reinforcement & Stabilisation Protect and sustain landscapes, driveways, siteworks and more when there is a potential of subsidence, reinforcement or stabilisation...

Cladco Composite Decking

A more eco-friendly and low maintenance solution in comparison to standard wood. Cladco Composite Decking is manufactured from a wide variety of wood fibres and plastic with additives that strengthen the boards and an anti-UV agent to help resist colour fade.

Types



Variety of colours

Specifications

Width x Thickness	Lengths	
150mm x 25mm	2.4m / 4m	
Weight:	Solid 12.5Kg / 20.92Kg or Hollow 6.72Kg / 11.2Kg	
Profiles:	60% recycled Hardwood fibres and 40% High grade recycled Polyethylene, bonding agent, additives and tint	
Certified:	FSC [®]	
Colours:	Teak, light grey, stone grey, coffee, charcoal, redwood, olive green and ivory	

Please visit our website for specific sizes or contact us with your requirements, we can source a vast portfolio of profiles and sizes.





Elite Composite Decking

Long lasting decking made from a variety of recycled materials.

Elite Composite Decking is a strong and resistant solution from splits, splinters, rot and fungal decay, the ideal choice for any commercial or residential spaces.

Types



Specifications

Width x Thickness	
150mm x 25mm	2.4m / 4m
Weight:	Solid 12.5Kg / 20.92Kg or
Profiles:	60% recycled Hardwood Polyethylene, bonding ag
Certified:	FSC [®]
Colours:	Charcoal, stone grey, ligh


Please visit our website for specific sizes or contact us with your requirements, we can source a vast portfolio of profiles and sizes.

www.elite-timber.com



in

O

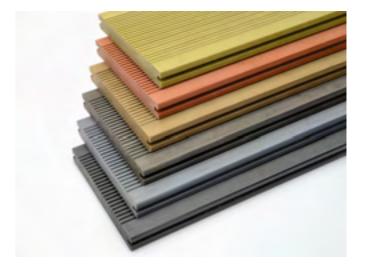

Lengths

r Hollow 6.72Kg / 11.2Kg fibres and 40% High grade recycled gent, additives and tint

nt grey, ivory, redwood and olive green

Same & next day

We have our own vehicles and work closely with couriers to dispatch your items fast.



Collection

If you are near to our storage depot or want to travel to us, collect your items for free.

Composite Cladding

Protect structural walls from ingress water and add an extra layer of insulation for the development of buildings.

Profiles are made from a mixture of wood and plastic composite for high-quality cladding to cover exterior walls and reduce structural and interior problems.

Types





Textured

Smooth

Specifications

Size options	Width x Thickness	Lengths	
Standard Large	180mm x 8mm 214mm x 11mm	3.6m 3.6m	
Weight:	Standard 7.4Kg / Large 10.5Kg		
Material:	Composite		
Profiles:	Weatherboard with maximum flexibility to fit horizontally, vertically, ship-lapped or open jointed		
Certified:	BBA (Approval Inspection Testing Certification)		
Colours:	21 colours for standard boards / 4 colours for large boards		

Please visit our website for specific sizes or contact us with your requirements, we can source a vast portfolio of profiles and sizes.



DuraMatt Lite Ground Protection Board

Ground Protection Board for surface cover and temporary access of light vehicles. The DuraMatt Lite Ground Protection Board is a far more effective temporary surface/ spoilboard cover than plywood, which can commonly split and break. It can be reused or recycled again and again after each project.

Sustainability



ן

Long life

Store & Reuse

Withstand Temperatures

Specifications

Width x Thickness	
1100mm x 10mm	2.4m
Weight:	32Kg
Tolerances:	Suggested 5 tonnes Weight tested up to 10 to
Material:	100% recycled Low Densi
Colours:	Grey as standard Other colours also availa

Please contact us for specific sizes and your requirements, we can source alternative solutions and sizes.

UK delivery All areas of the UK are covered, as well as same or next day delivery available on many products.



www.elite-timber.com



in

O



Lengths

connes (depending on ground conditions) sity Polyethylene (LDPE) and 100% recyclable

able (subject to minimum order quantity)

is specific to what you're looking for.



Financial advice

Support doesn't have to end after a sale. We care to help you get the results for your project.

DuraMatt Medium Duty Access Mat

Temporary cover and protection for limiting dirt and bogging during siteworks. The DuraMatt Medium Duty Access Mat is lightweight, but heavy duty in nature, and flexible for an easy installation. It has a 'nonslip' top surface and is ideal for covering flat and solid surfaces or soft and sensitive ground.

Store & Reuse

Sustainability








Long life

Weather Protection



Size options	Width x Thickness	Lengths
Full size Half size	1230mm x 12mm 600mm x 12mm	2.45m 2.4m
Weight:	Full size 32Kg / Half size 17Kg	
Tolerances:	Suggested 10-15 tonnes Weight tested up to 20 tonnes (depending on ground conditions)	
Material:	100% recycled Low Density Polyethylene (LDPE) and 100% recyclable	
Colours:	Grey as standard Other colours also available (subject to minimum order quantity)	

Please contact us for specific sizes and your requirements, we can source alternative solutions and sizes.

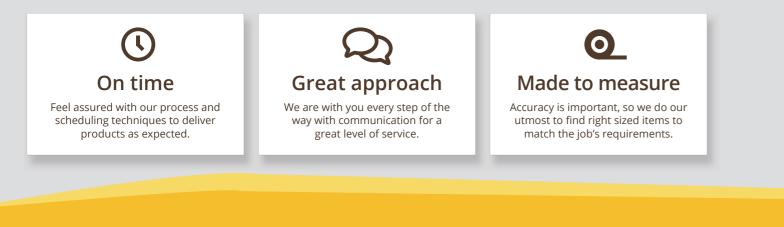

EuroTrak Heavy Duty Access Mat

Temporary heavy duty matting to provide short and long-term access solution over soft and sensitive ground.

The EuroTrak HD Access Mat is most commonly used to reduce disturbance and damage to the ground during the use of plant and machinery on a temporary access route or roadway.

Sustainability





Long life

Store & Reuse

Withstand Temperatures

Specifications

Size options	Width x Thickness	Lengths
Full size Half size	1200mm x 15mm 600mm x 15mm	2.4m 2.4m
Weight:	Full size 44Kg / Half size 22Kg	
Tolerances:	Suggested 60 tonnes Weight tested up to 120 tonnes (depending on ground conditions and when used with a sub-base)	
Material:	100% recycled High Density Polyethylene (HDPE) and 100% recyclable	
Colours:	Black	

Please contact us for specific sizes and your requirements, we can source alternative solutions and sizes.





in

O





Expert team

You can count on us! We have a fantastic customer service to demonstrate when you contact us.

Elite Grass Grid Ground Reinforcement

Permanent and semi-permanent ground reinforcement for the stabilisation of earth banks.

The Elite Grass Grid is an eco-friendly solution that substantially improves soft or sensitive ground when being used for access, overflow parking or the stabilisation of embankments.

Types



Phreman

Type 2

Type 1


Type 3



Specifications

Width x Thickness	Lengths
490mm x 40mm	490mm
Weight:	Type 1: 0.8Kg / Type 2: 1Kg / Type 3: 1.5Kg per grid 4.4 tiles per m ²
Tolerances:	Type 1: 160 tonnes / Type 2: 240 tonnes / Type 3: 500 tonnes per m ²
Material:	100% recycled material, which is also 100% recyclable
Colours:	Green/grey as standard (colours can slightly vary) Other colours available (subject to a minimum order quantity)


Please contact us with your requirements and check our website for other important information.

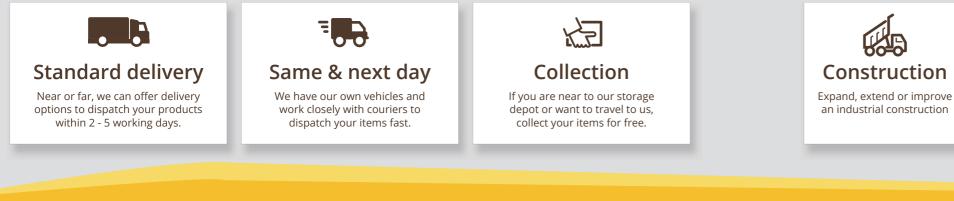

Elite GP-Flex® Ground Stabilisation

A flexible grass protection mesh system for fast stabilisation and reinforcement. Elite GP-Flex protects grassed areas against damage from pedestrian and vehicle use. Its unique method of extrusion is tested to BS 7976-2 with 33% improvement for slipresistance, in comparison to other meshes.

Types



Chasifications

1.8Kg/m²

Specifications

Width x Thickness	
1000mm / 2000mm x 9mm / 11mm / 13mm	10m / 20m
Weight:	1Kg / 1.4Kg / 1.8Kg per m available in three grades
Tolerances:	Recommended 8 tonnes
Material:	100% recycled High Dens
Colours:	Green/brown

Please contact us for specific sizes and your requirements, we can source alternative solutions and sizes.

Civil Engineering

Specific materials to complete

a design plan



- 35 -

in info@e

O.



Lengths

m²

s for different purposes

s (depending on ground conditions)

nsity Polyethylene (HDPE) and 100% recyclable



Improve surrounding land with decorative structures



Building

Long lasting, thermal, insulated or fire retardant items



Building Materials



Our additional building materials are acquired from reputable industry manufacturers to suit your requirements. Whether the project is on a construction site, large build or small DIY project, our products accompany the majority of timber items to execute the foundation or bulk work.

With the importance of safety and structural concerns, we help by suggesting these materials for your end-use.





Insulation Internal or external insulation using Wool Loft Rolls or Thermal PIR Board...

Cement Often used by itself, Cement helps with construction and building foundations...



Mortar Tubs Assist in maintaining a clean and safe working space with Mortar Tubs, that are durable..



Elite RubbleTruck[™] Ideal for site workers, with the purpose of carrying any materials or rubbish..

www.elite-timber.com







Instarmac Finish, cover or repair in style with the trusted and well recognised range ...

Wool Loft Roll Insulation

Natural insulation for thermal padding of pitched roofs, floors and walls.

Wool Loft Roll is manufactured from 100% low density glass mineral wool with potential for zero ozone depletion and zero global warming. It's useful between ceiling joists or as an additional top layer and is non-combustible.

Treatments





Thermal

Fire resistant

Specifications

Width x Thickness	Lengths
1220mm x 4-25mm	2.4m
Tolerances:	0mm
Species:	Not applicable
Profiles:	Square edge
Grading:	BS EN 13162 / ISO 14001
Treatments:	Thermal or fire resistance

Please visit our website for specific sizes of our biodegradable wool loft roll or contact us with your requirements, we can source a vast portfolio of sizes.



in


O

Thermal PIR Board Insulation

Upgrade thermal performance on building elements and reduce CO² emissions whilst being compliant with building regulations and standards.

PIR (Fibre-free Rigid Polyisocyanurate) is designed to eliminate thermal bridges within pitched roofs, floors, walls, ceilings and more!

Treatments





Thermal

Fire Resistant

Water Resilient

Specifications

Width x Thickness	
6020mm x 25-120mm	1.2m
Tolerances:	0mm
Species:	Not applicable
Profiles:	Square edge
Grading:	BS EN 13162 / ISO 14001
Treatments:	Thermal, fire resistance a

Please visit our website for specific sizes or contact us with your requirements, we can source a vast portfolio of sizes.

www.elite-timber.com

- 39 -





Lengths and water resistance



Made to measure

Accuracy is important, so we do our utmost to find right sized items to match the job's requirements.

Cement

Allow materials to bind together on-site for big or small projects.

Cement is often used to help with construction and building the foundations of a structure. Other times, it is mixed with materials and water for other applications such as rendering, mortar or screening.

Types









Mortar/Concrete

Grout

Specifications

Coverage:	0.115m ² at 100mm thickness
Application:	Internal or external
Weight:	20Kg
Model:	GEN-CEM25
Grading:	BS 5838-1:1980 / BS EN 197 / BS EN 15167
Workability:	Minimum 28 day strength 25N/mm ² (MPa)

Please visit our website for further information, our Mortar Tubs can be used for storage and mixing of Cement.



Instarmac

Finish in style with the trusted and well recognised range of Instarmac UltraCrete products. These mortars, concretes, surface finishes and coatings all have a long-life span and conform with the BBA's Highways Authorities Product Approval (HAPAS) scheme for use in the highways maintenance sector.



Bedding Mortars

Envirobed® CD534

- Bedding of all access covers
- Approved for Underground and 3 hours Overground track locations
- Can be used in wet conditions 53N/mm² compressive strength and low temperatures

M60 Rapid Strength and M60 F Fibre Reinforced

• For access covers, bedding and profiling of kerbs and tidal repairs Often used by Local Authorities

for reinstatement of gulley grates

and access covers in both the

footway and carriageway Conforms to HD27/15

• 6.10N/mm² tensile strength in

- Open to traffic in 1 hour
- M60 F option is fibre reinforced
- for added strength



Cold lay Asphalt Concretes & Tack Coats

SCJ Seal and Tack Coat Spray

· Cold joint sealer for vertical edges · Prolongs life of the repair and surface base before asphalt Improves bond

 Seals and waterproofs edges 10 linear metres coverage

Instant Road Repair[®] 6mm and 10mm grade

- 6mm: Permanent repairs in footways, footpaths and tracks 10mm: Permanent repairs in any Type 3 & 4 carriageway
 - Open to traffic instantly No waste Can be used in all weathers Resealable tubs for no waste





Ó

in



High Specification Concretes

QC10 Rapid Strength

- Flowable Concrete for ironwork backfilling, post installation and surface repairs, and more
- Open to traffic in 2 hours

QC10 F Rapid Set Flowable

- Best for backfilling around
- manhole frames and gullies 20N/mm² compressive strength in 90 minutes
- 20Nmm² compressive strength in
- 2 hours for faster strength gain
- Rapid set in 10-20 minutes
- Depth of 30mm-250mm
- Open to traffic in 90 minutes
- Rapid set within 10-20 minutes
- Shrinkage compensated
- Depth of 30mm-500mm



Ancillaries

Instaband ECO® Thermoplastic Overbanding

- Permanent patching schemes and around utility cuts
- Prolongs life of the repair
- Seals and waterproofs edges
- Cut as required for no waste
- Open to traffic in 10 minutes

LMP Temporary Line Marking Paint

- · Temporarily marking up defects, hidden utility assets and repairs as well as marking out for car parks, warehouse floors etc.
- 3 month' wear
- Approx. 350 linear metres coverage per can
- · Red, yellow, white and blue

Mortar Tubs

Reduce clutter on site by distributing mortar in tubs around a building via cranes and telehandlers.

Mortar Tubs help to maintain a clean and safe working space and are easy to handle when filled. Movement is reduced when transported as the tubs are compatible with forklift skids through their enclosed channels at the base.

The Tubs have been rotationally moulded for a robust design under heavy loads and manufactured from recycled materials, with environmental effect in mind.



Specifications

Height x Width	Lengths
560mm x 760mm	1065mm
Weight:	9Kg
Capacity:	250 Litres
Material:	Recycled Polyethylene Plastic
Colours:	White as standard - please ask for other available colours

Please visit our website for information on the key features of this product and contact us with your requirements for other available sizes.



Elite RubbleTruck[™]

A durable and heavy duty barrow designed for tidiness and efficiency in the workplace. The Elite RubbleTruck allows site workers to maintain a clean and safe working space, with the purpose of carrying any materials or rubbish that are lying around.

A fantastic truck system, with a large capacity scoop, that has an in-built tipping feature which is the perfect option for handling waste and rubble whilst manoeuvring around on its solid rubber, puncture proof wheels.

Specifications

Height x Width	
855mm x 760mm	1460mm
Weight:	88.5Kg
Capacity:	400 Litres
Material:	Powder coated robust St
Accessories:	1x quick-fix bolt on heavy RubbleTruck lid (available

Please visit our website for further information, the Elite RubbleTruck can be used for storage and as an option for mixing mortar or cement.



- 43 -

in



Lengths

teel

y-duty castor and 2 x linchpins le at additional cost)

Bespoke products

Sometimes standard specifications won't suffice, so our bespoke service is specific to what you're looking for.



Financial advice

Support doesn't have to end after a sale. We care to help you get the results for your project.



Elite Timber Supplies Ltd

Part of the Elite Group of companies



Head Office, 1 Steel Close, Little End Road, Eaton Socon, Cambridgeshire, PE19 8TT.

